

LED bathroom lighting. Class II.


RAL 9016 white powdercoated extruded aluminium profile.
Prismatic opal acrylic shade.


Fitted to the wall. IP 44 for horizontal mounting.

Cable entry in the centre of the backside. Surface-mounted cables can be used.

Lifespan L70 Ta25 50000h (B50)
MacAdam 3 SDCM CRI: >80

IP 44 | CE 

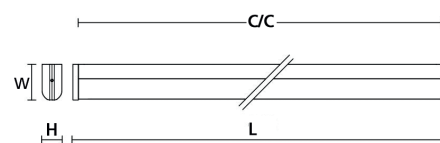

| Type | Lumen | Art no. | E no. | L | W | H | c/c | Power | Weight |
|--|-------|----------|-----------|-----|----|----|-----|-------|--------|
| IR 9 LED 1500 830 | 1120 | 1 534 19 | 70 138 64 | 640 | 77 | 43 | 625 | 11 | 1,5 |
| IR 9 LED 1500 840 | 1150 | 1 534 17 | 70 138 65 | 640 | 77 | 43 | 625 | 11 | 1,5 |
| IR 9 LED 1500 830 Sensor  | 1120 | 1 534 25 | 70 163 29 | 640 | 77 | 43 | 625 | 11 | 1,5 |