



Spotlight for fitting to 3-phase lighting track.

Rotating aluminium housing. Direction-adjustable diecast aluminium housing with integrated cooling.



Black anodized aluminium passive cooling. Standard with faceted pure aluminium reflector.

As standard with a 3-phase universal adapter.

TD is equipped with dimmable GlobalTrac-adapter.

Lifespan L80 Ta25 50000h (B50)  
MacAdam 3 SDCM CRI: >80

IP 20 | CE

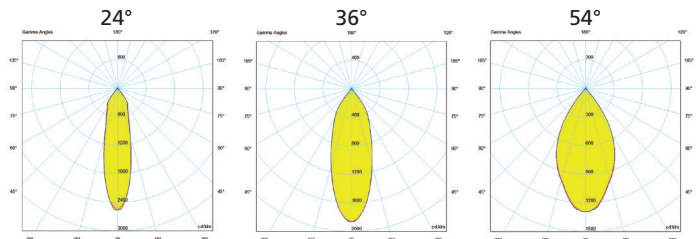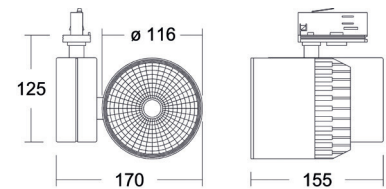

Type	Lumen	Art no.	E no.	Power	Weight
Vega 3000 830 24°	2980	2 625 03	74 372 55	30	1,4
Vega 3000 840 24°	3100	2 625 04	74 012 23	30	1,4
Vega 3000 830 36°	2900	2 625 05	74 372 56	30	1,4
Vega 3000 840 36°	3020	2 625 06	74 012 24	30	1,4
Vega 3000 830 54°	2700	2 625 07	74 372 57	30	1,4
Vega 3000 840 54°	2800	2 625 09	74 012 25	30	1,4
Vega 4500 830 24°	4030	2 625 28	74 006 03	46	1,5
Vega 4500 840 24°	4200	2 625 30	74 012 26	46	1,5
Vega 4500 830 36°	3900	2 625 32	74 006 34	46	1,5
Vega 4500 840 36°	4070	2 625 34	74 012 27	46	1,5
Vega 4500 830 54°	3650	2 625 36	74 006 35	46	1,5
Vega 4500 840 54°	3800	2 625 38	74 012 28	46	1,5
Vega 4500 830 24° TD*	4030	2 625 29	-	46	1,5
Vega 4500 840 24° TD*	4200	2 625 31	-	46	1,5
Vega 4500 830 36° TD*	3900	2 625 33	-	46	1,5
Vega 4500 840 36° TD*	4070	2 625 35	-	46	1,5
Vega 4500 830 54° TD*	3650	2 625 40	-	46	1,5
Vega 4500 840 54° TD*	3800	2 625 42	-	46	1,5

\* Equipped with Dali dimming driver