

Interior luminaire for surface or pendant mounting with or without uplight.

Sheetmetal housing with RAL 9010 textured white paint. Plastic endcaps. Opal diffuser in eloxated aluminium frame.

**Ceiling version:**

Connection at ends or centre of fixture. Fixing with keyhole.

**Pendant and uplight version:**

As standard with adjustable suspension wire with halogen-free cable 2.4 m with earthed plug. Version available with separated down-/uplight (ST).

Dimmable version (TDC) equipped with Dali dimmable driver, push-button control and corridor function. Pendant version equipped with 5-wire cable.

**AirC:**

Sensorsystem with daylightcontrol, programmable with app. The sensor can also communicate wireless with several other sensors. Also possible to integrate wireless switches. Can be fitted with sensor and pull-cord switch.

Lifetime L80 Ta25 100 000h (B50)  
MacAdams 3 SDCM CRI: >80

IP 20 | CE **AirC**


Pendant with uplight



Adjustable wire suspension



Accessory	Art no.	E-no.
Rails for 600 T-section with slide screws	9 552 18	70 143 72
M6 clips for T-section	9 552 08	-
Switch AirC SwitchDim 1 pole	9 688 20	79 852 54

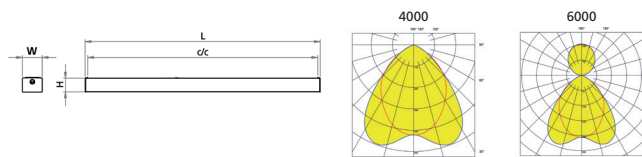

**Ceiling**

Type	Lumen 830	Art no. 830	E-no.	Lumen 840	Art no. 840	E-no.	L	W	H	c/c	Power	Weight
OfficeLED 4000 OP	3930	1 554 10	70 178 57	4080	1 554 11	70 178 58	1193	101	73	1140	37	3,6
OfficeLED 4000 OP TDC *	3930	1 554 20	70 178 59	4080	1 554 21	70 178 60	1193	101	73	1140	37	3,6
OfficeLED 4000 OP AirC *	3930	1 547 66	70 178 61	4080	1 547 67	70 178 62	1193	101	73	1140	37	3,7

**Pendant**

Type	Lumen 830	Art no. 830	E-no.	Lumen 840	Art no. 840	E-no.	L	W	H	c/c	Power	Weight
OfficeLED P 4000 OP	3930	1 554 30	70 178 63	4080	1 554 31	70 178 64	1193	101	73	1140	37	3,6
OfficeLED P 4000 OP TDC *	3930	1 554 40	70 178 65	4080	1 554 41	70 178 66	1193	101	73	1140	37	3,6
OfficeLED P 4000 OP AirC *	3930	1 547 68	70 178 67	4080	1 547 69	70 178 68	1193	101	73	1140	37	3,7

**Pendant uplight**

Type	Lumen 830	Art no. 830	E-no.	Lumen 840	Art no. 840	E-no.	L	W	H	c/c	Power	Weight
OfficeLED 6000 OP	6100	1 554 50	70 178 69	6350	1 554 51	70 178 70	1193	101	73	1140	54	4
OfficeLED 6000 OP TDC *	6100	1 554 60	70 178 71	6350	1 554 61	70 178 72	1193	101	73	1140	54	4
OfficeLED 6000 OP AirC *	6100	1 547 70	70 178 73	6350	1 547 71	70 178 74	1193	101	73	1140	54	4,1

**Pendant uplight or downlight with separate switch**

Type	Lumen 830	Art no. 830	E-no.	Lumen 840	Art no. 840	E-no.	L	W	H	c/c	Power	Weight
OfficeLED 6000 OP ST	6100	1 554 70	70 178 75	6350	1 554 71	70 178 76	1193	101	73	1140	54	4
OfficeLED 6000 OP ST TDC *	6100	1 554 80	70 178 77	6350	1 554 81	70 178 78	1193	101	73	1140	54	4

\* Equipped with amplitude-dimmable driver for DALI, push-button control and corridor function.